

FRONIUS PRIMO

/ Optimised energy management.



/ The Fronius Primo in power categories from 3.0 to 8.2 kW perfectly completes the SnapINverter generation. This single-phase, transformerless device is the ideal inverter for residential systems. Its innovative SuperFlex Design provides maximum flexibility in system design, while the SnapINverter mounting system makes installation and maintenance easier than ever before. The communication package included as standard, with WLAN, energy management, several interfaces and much more, allows the Fronius Primo to communicate with the user, the PV system and the grid.

TECHNICAL DATA FRONIUS PRIMO (3.0-1, 3.5-1, 3.6-1, 4.0-1, 4.6-1)

INPUT DATA	PRIMO 3.0-1	PRIMO 3.5-1	PRIMO 3.6-1 ¹⁾	PRIMO 4.0-1	PRIMO 4.6-1 ¹⁾
Max. input current ($I_{dc\ max\ 1}$ / $I_{dc\ max\ 2}$)			12.0 A / 12.0 A		
Max. array short circuit current (MPP_1 / MPP_2)			18.0 A / 18.0 A		
Min. input voltage ($U_{dc\ min}$)			80 V		
Feed-in start voltage ($U_{dc\ start}$)			80 V		
Nominal input voltage ($U_{dc,r}$)			710 V		
Max. input voltage ($U_{dc\ max}$)			1,000 V		
Usable MPP voltage range ($U_{mpp\ min} - U_{mpp\ max}$)			80 V - 800 V		
MPP voltage range at nominal power ($U_{mpp\ min} - U_{mpp\ max}$)		200 - 800 V		210 - 800 V	240 - 800 V
Number of MPP trackers			2		
Number of DC connections			2 + 2		
Max total PV array size ($P_{dc\ max}$)	4.5 kW _{peak}	5.3 kW _{peak}	5.5 kW _{peak}	6.0 kW _{peak}	6.9 kW _{peak}

OUTPUT DATA	PRIMO 3.0-1	PRIMO 3.5-1	PRIMO 3.6-1 ¹⁾	PRIMO 4.0-1	PRIMO 4.6-1 ¹⁾
AC nominal output ($P_{ac,r}$)	3,000 W	3,500 W	3,680 W	4,000 W	4,600 W
Max. output power	3,000 VA	3,500 VA	3,680 VA	4,000 VA	4,600 VA
AC output current ($I_{ac\ nom}$)	13.0 A	15.2 A	16.0 A	17.4 A	20.0 A
Grid connection (voltage range)			1 ~ NPE 220 V / 230 V (180 V - 270 V)		
Frequency (frequency range)			50 Hz / 60 Hz (45 - 65 Hz)		
Total harmonic distortion			< 5 %		
Power factor ($\cos\varphi_{ac,r}$)			0.85 - 1 ind. / cap.		

¹⁾ Available upon request, conditions apply.

TECHNICAL DATA FRONIUS PRIMO (3.0-1, 3.5-1, 3.6-1, 4.0-1, 4.6-1)

GENERAL DATA	PRIMO 3.0-1	PRIMO 3.5-1	PRIMO 3.6-1 ¹⁾	PRIMO 4.0-1	PRIMO 4.6-1 ¹⁾
Dimensions (height x width x depth)			645 x 431 x 204 mm		
Weight			21.5 kg		
Degree of protection			IP 65		
Protection class			1		
Oversupply category (DC / AC) ²⁾			2 / 3		
Night time consumption			< 1 W		
Inverter design			Transformerless		
Cooling			Regulated air cooling		
Installation			Indoor and outdoor installation		
Ambient temperature range			-40 - +55 °C		
Permitted humidity			0 - 100 %		
Max. altitude			4,000 m		
DC connection technology			4x DC+ and 4x DC- screw terminals 2.5 - 16 mm ²		
Mains connection technology			3-pole AC screw terminals 2.5 - 16 mm ²		
Certificates and compliance with standards			DIN VDE 0126-1/A1, IEC 62109-1-2, IEC 62116, IEC 61727, AS 4777-2, AS 4777-3, G83/2, G59/3, CEI 0-21, VDE AR N 4105		

EFFICIENCY	PRIMO 3.0-1	PRIMO 3.5-1	PRIMO 3.6-1 ¹⁾	PRIMO 4.0-1	PRIMO 4.6-1 ¹⁾
Max. efficiency	97.9 %	98.0 %	98.0 %	98.0 %	98.0 %
European efficiency (η_{EU})	96.1 %	96.8 %	96.8 %	97.0 %	97.0 %
η at 5 % $P_{AC,r}^{(3)}$	80.8 / 82.5 / 82.5 %	80.8 / 82.5 / 82.5 %	80.8 / 82.5 / 82.5 %	80.8 / 82.5 / 82.5 %	80.8 / 82.5 / 82.5 %
η at 10 % $P_{AC,r}^{(3)}$	84.1 / 86.5 / 86.1 %	86.3 / 93.6 / 91.8 %	86.3 / 93.6 / 91.8 %	86.6 / 93.9 / 92.2 %	88.9 / 94.4 / 92.9 %
η at 20 % $P_{AC,r}^{(3)}$	90.3 / 95.5 / 94.8 %	91.6 / 96.2 / 95.2 %	91.6 / 96.2 / 95.2 %	92.2 / 96.7 / 95.6 %	93.0 / 97.0 / 95.9 %
η at 25 % $P_{AC,r}^{(3)}$	91.8 / 96.4 / 95.1 %	92.7 / 96.9 / 95.8 %	92.7 / 96.9 / 95.8 %	93.2 / 97.2 / 96.1 %	93.9 / 97.2 / 96.6 %
η at 30 % $P_{AC,r}^{(3)}$	92.7 / 96.9 / 96.0 %	93.5 / 97.2 / 96.3 %	93.5 / 97.2 / 96.3 %	94.0 / 97.2 / 96.8 %	94.5 / 97.3 / 96.9 %
η at 50 % $P_{AC,r}^{(3)}$	94.5 / 97.4 / 97.0 %	95.0 / 97.7 / 97.3 %	95.0 / 97.7 / 97.3 %	95.2 / 97.8 / 97.4 %	95.6 / 97.9 / 97.6 %
η at 75 % $P_{AC,r}^{(3)}$	95.4 / 97.9 / 97.7 %	95.6 / 97.8 / 97.8 %	95.6 / 97.8 / 97.8 %	95.8 / 97.9 / 97.8 %	96.0 / 97.9 / 97.8 %
η bei 100 % $P_{AC,r}^{(3)}$	95.7 / 97.9 / 97.8 %	95.8 / 98.0 / 97.8 %	95.8 / 98.0 / 97.8 %	95.9 / 98.0 / 97.9 %	96.2 / 97.9 / 98.0 %
MPP adaptation efficiency				> 99.9 %	

PROTECTIVE DEVICES	PRIMO 3.0-1	PRIMO 3.5-1	PRIMO 3.6-1 ¹⁾	PRIMO 4.0-1	PRIMO 4.6-1 ¹⁾
DC insulation measurement			Yes		
Overload behaviour			Operating point shift, Power limitation		
DC disconnector			Yes		
Reverse polarity protection			Yes		

INTERFACES	PRIMO 3.0-1	PRIMO 3.5-1	PRIMO 3.6-1 ¹⁾	PRIMO 4.0-1	PRIMO 4.6-1 ¹⁾
WLAN / Ethernet LAN			Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)		
6 inputs and 4 digital in/out			Interface to ripple control receiver		
USB (A socket) ⁴⁾			Datalogging, inverter update via USB flash drive		
2x RS422 (RJ45 socket) ⁴⁾			Fronius Solar Net		
Signalling output ⁴⁾			Energy management (potential-free relay output)		
Datalogger and Webserver			Included		
External input ⁴⁾			S0-Meter Interface / Input for overvoltage protection		
RS485			Modbus RTU SunSpec or meter connection		

¹⁾ Available upon request, conditions apply.

²⁾ According to IEC 62109-1.


³⁾ And at $U_{DC,r}^{(3)}$ / $U_{DC,r}^{(3)}$ / $U_{MPPT\ max}$.

⁴⁾ Also available in the light version.

FRONIUS PRIMO 8.2-1 EFFICIENCY CURVE



FRONIUS PRIMO 8.2-1 TEMPERATURE DERATING

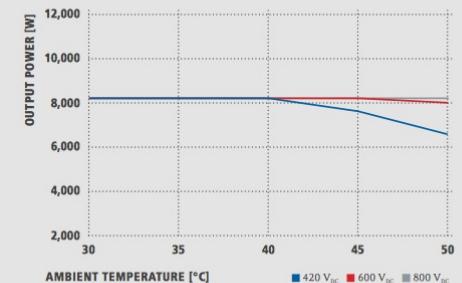

TECHNICAL DATA FRONIUS PRIMO (5.0-1, 5.0-1 AUS, 6.0-1, 8.2-1)

INPUT DATA	PRIMO 5.0-1 ¹⁾	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
Max. input current ($I_{DC,1\ max}$ / $I_{DC,2\ max}$)	12.0 A / 12.0 A		18.0 A / 18.0 A	
Max. array short circuit current (MPP/MPP _r)	18.0 A / 18.0 A		27.0 A / 27.0 A	
Min. input voltage ($U_{DC,min}$)			80 V	
Feed-in start voltage ($U_{DC,start}$)			80 V	
Nominal input voltage ($U_{DC,nom}$)			110 V	
Max. input voltage ($U_{DC,max}$)			1,000 V	
Usable MPP voltage range ($U_{MPPT,min} - U_{MPPT,max}$)			80 V - 800 V	
MPP voltage range at nominal power ($U_{MPPT,min} = U_{MPPT,max}$)			240 - 800 V	
Number of MPP trackers			2	
Number of DC connections			2 + 2	
Max. input voltage ($P_{DC,max}$)	7.5 kW _{peak}	7.5 kW _{peak}	9.0 kW _{peak}	12.3 kW _{peak}

OUTPUT DATA	PRIMO 5.0-1 ¹⁾	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
AC nominal output ($P_{AC,r}$)	5,000 W	4,600 W	6,000 W	8,200 W
Max. output power	5,000 VA	5,000 VA	6,000 VA	8,200 VA
AC output current ($I_{AC,nom}$)	21.7 A	21.7 A	26.1 A	35.7 A
Grid connection (voltage range)			1 - NPE 220 V / 230 V (180 V - 270 V)	
Frequency (frequency range)			50 Hz / 60 Hz (45 - 65 Hz)	
Total harmonic distortion			< 5 %	
Power factor ($\cos \varphi_{AC,r}$)			0.85 - 1 ind. / cap.	

GENERAL DATA	PRIMO 5.0-1 ¹⁾	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
Dimensions (height x width x depth)			645 x 431 x 204 mm	
Weight			21.5 kg	
Degree of protection			IP 65	
Protection class			1	
Oversupply category (DC / AC) ²⁾			2 / 3	
Night time consumption			< 1 W	
Inverter design			Transformerless	
Cooling			Regulated air cooling	
Installation			Indoor and outdoor installation	
Ambient temperature range			-40 - +55 °C	
Permitted humidity			0 - 100 %	
Max. altitude			4,000 m	
DC connection technology			4x DC+ and 4x DC- screw terminals 2.5 - 16 mm ²	
Mains connection technology			3-pole AC screw terminals 2.5 - 16 mm ²	
Certificates and compliance with standards			DIN VDE 0126-1/A1, IEC 62109-1-2, IEC 62116, IEC 61727, AS 4777-2, AS 4777-3, G83/2, G59/3, CEI 0-21, VDE AR N 4105	

¹⁾ Available upon request, conditions apply.

²⁾ According to IEC 62109-1.